

## High Brightness

Designed to work outdoors and in bright indoor locations, the high bright 2500 nit rating of the display is suitable for sunlit locations and the double AR (Anti-Reflective) coating further enhances visibility while maintaining maximum clarity.

## Digital Signage Ready


Use standard video input to run a wide range of digital signage applications.

## Weather Sealed

IP65 rated

Front tempered glass sealed to an aluminum chassis with stylish powder coated outer frame.

Connections enclosed within a gasket sealed recess on the back.

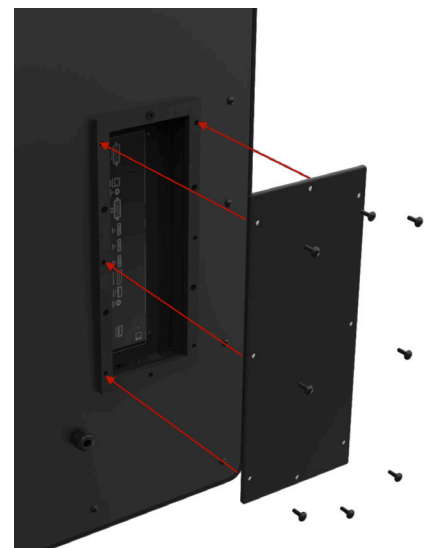

**Specification**

<b>Display Type:</b>	55" TFT, LED Backlit
<b>Display Resolution:</b>	1920 x 1080
<b>Aspect Ratio:</b>	16:9
<b>Brightness:</b>	2500 nit (cd/m2)
<b>Contrast:</b>	1300:1
<b>Colors:</b>	1.06 Billion
<b>Response time:</b>	12ms
<b>Orientation:</b>	Landscape or Portrait
<b>Viewing Angle:</b>	178° Horizontal & Vertical
<b>Video Inputs:</b>	1 x HDMI 1 x Displayport 1 x VGA (ARGB)
<b>Audio:</b>	Line out (headphone type jack)
<b>Sensors</b>	Temperature sensor Humidity sensor Backlight & Power Current

<b>Functions:</b>	Brightness, contrast, color temperature, audio volume
<b>Ingress Protection</b>	IP-65: No ingress of dust; Water projected by a nozzle (6.3 mm) against enclosure from any direction shall have no harmful effects.
<b>Temperature (operating):</b>	0°C to 40°C
<b>Humidity (operating):</b>	10-90%
<b>Power:</b>	100 - 240VAC 50/60Hz, 5A(max) Consumption: 180W (typ)
<b>Mounting:</b>	VESA 400mm x 200mm
<b>Display Dimensions:</b>	50" W x 29.3" H x 1.9"
<b>Display Weight:</b>	92 lbs
<b>Shipping Dimensions:</b>	64" x 35" x 8.5"
<b>Shipping Weight:</b>	103 lbs
<b>Approvals:</b>	FCC Type A, UL
<b>Warranty:</b>	1 year

Specifications subject to change without notice

**Order Numbers**

<b>55" Monitor</b>	P/N: V-5500-2500-C
--------------------	--------------------

**Volanti Displays**

 18440 Technology Drive, Suite 130  
 Morgan Hill, CA 95037, USA

 Call Us On: **+1.408.500.3500**
[www.volantidisplays.com](http://www.volantidisplays.com)
